

















Off-Grid ESS Solution

SE-F5 & SE-F12 & SUN-3.6/5/6K-OG01LP1-EU-AM2

SE-F5 & SE-F12

-  **Comprehensive Protection**
Advanced BMS with active fuse
-  **Flexible Expansion**
Max. 32 units in parallel
-  **Superior Performance**
Supports Max. 1.2C (6kW or 12kW) discharge, GaN MOSFETs: 50% loss reduction, high-temp resilient
-  **Easy Maintenance**
Auto-networking, Local monitoring mode for battery, remote monitoring mode for ESS
-  **Optimized Energy Density**
Integrated PACK: reduced line loss, enhanced energy density
-  **Reliable Durability**
Operates reliably in -20°C to 55°C, natural cooling

SUN-3.6/5/6K-OG01LP1-EU-AM2

-  **High Performance**
Support a peak output of 2 times the rated power for up to 10 seconds
-  **Outdoor-Ready**
IP65-rated, built to withstand tough environments
-  **Durable & Reliable**
Independent cooling design reduces dust accumulation and extends lifespan
-  **High Efficiency**
4ms UPS-level switching time
Max. efficiency of 97.6% for optimal performance
-  **Smart MPPT Technology**
2 MPPTs, supports 1.6x PV oversizing (18A+18A), optimizing energy from panels at various angles
-  **Long-Term Assurance**
5-year warranty, extendable to 10 years for peace of mind
-  **Parallel Scalability**
Supports 16 pcs parallel (off-grid)
-  **Generator Integration**
Support storing energy from diesel generator

Model	SUN-3.6K-OG01LP1-EU-AM2	SUN-5K-OG01LP1-EU-AM2	SUN-6K-OG01LP1-EU-AM2
Battery Input Data			
Battery Type	Lead-acid or Lithium-ion		
Battery Voltage Range (V)	40-60		
Max. Charging Current (A)	90	120	135
Max. Discharging Current (A)	90	120	135
Charging Strategy for Li-ion Battery	Self-adaption to BMS		
Number of Battery Input	1		
PV String Input Data			
Max. PV Access Power (W)	7200	10000	12000
Max. PV Input Power (W)	5760	8000	9600
Max. PV Input Voltage (V)	500		
Start-up Voltage (V)	125		
PV Input Voltage(V)	125-500		
MPPT Voltage Range(V)	150-425		
Full Load MPPT Voltage Range(V)	300-425		
Rated PV Input Voltage (V)	370		
Max. Operating PV Input Current (A)	18+18		
Max. Input Short-Circuit Current (A)	27+27		
No. of MPP Trackers/No. of Strings MPP Tracker	2/1+1		
Max. Inverter Backfeed Current to The Array(A)	0		
AC Output Data			
Rated AC Output Power (VA/W)	3600	5000	6000
Max. AC Output Power (VA/W)	3600	5000	6000
Max. AC Output Current (A)	15.7	21.8	26.1
Peak Power (W)	2 times of rated power, 10s		
Rated Output Voltage (V)	230		
Output Type	L+N+PE		
Rated Output Frequency (V)	50Hz / 60Hz		
Output Voltage Waveform	Pure Sine Wave		
Total Current Harmonic Distortion THDi	< 3%		
AC Input Date(Grid and Generator)			
Max. Input Power to Battery (W)	3600	5000	6000
Rated Input Voltage (V)	230		
Rated Input Frequency	50Hz / 60Hz		
Gird Input Current (A)	35		
Generator Input Current (A)	35		
Efficiency			
Max. Efficiency	97.60%		
Euro Efficiency	96.50%		
MPPT Efficiency	>99%		
Equipment Protection			
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Overvoltage Load Drop Protection, Ground Fault Current Monitoring, Arc Fault Circuit Interrupter (optional), Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch, DC Terminal Insulation Impedance Monitoring, Residual Current (RCD) Detection, Surge protection level		
Surge Protection Level	TYPE II(DC), TYPE II(AC)		
Interface			
Communication Interface	RS485/RS232/CAN		
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)		
General Data			
Operating Temperature Range (°C)	-40 to +60°C, >45°C Derating		
Permissible Ambient Humidity	0-100%		
Permissible Altitude	3000m		
Noise (dB)	<45		
Ingress Protection(IP) Rating	IP 65		
Inverter Topology	Non-Isolated		
Over Voltage Category	OVC II(DC), OVC III(AC)		
Cabinet Size (WxHxD mm)	306×427.5×175.77 (Excluding Connectors and Brackets)		
Weight (kg)	12.2		
Type of Cooling	Intelligent Air Cooling		
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy		
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		

Off-Grid ESS Solution



Model		SE-F5	SE-F12
Main Parameters			
Battery Chemistry		LiFePO ₄	
Capacity ^[1]		100 Ah	230 Ah
Scalability		Max. 32 pcs in parallel	
Nominal Voltage		51.2 V	
Operating Voltage		44.8 V ~ 57.6 V	
Nominal Energy ^[1]		5.12 kWh	11.8 kWh
Charge Current ^[2]	Max. Continuous	50 A	115 A
	Peak	75 A (10 sec)	175 A (10 sec)
Discharge Current ^[2]	Max. Continuous	120 A	230 A
	Peak	150 A (10 sec)	280 A (10 sec)
Other Parameter			
Recommend Depth of Discharge		80% DoD	
Dimension (W × H × D)		370 × 548 × 140 mm (Without hanging board)	400 × 583 × 232 mm (Without hanging board)
Weight Approximate		39 kg	78 kg
LED Indicator		LED (SOC, working, protecting) & Buzzer	
IP Rating of Enclosure		IP21	
Operating Temperature		Charge: 0~55°C / Discharge: -20°C~55°C	
Storage Temperature		0~35°C	
Relative Humidity		95% (non-condensing)	
Altitude		≤3000m	
Cycle Life		≥6000(25°C±2°C,0.2C/0.2C,80%DOD,70%EOL)	
Installation		Wall-Mounted, Stack-Mounted	
Communication		CAN2.0, RS485, Bluetooth, APP	
Warranty Period ^[3]		5 years	
Energy Throughput ^[3]		8 MWh	18 MWh
Certification		UN38.3, MSDS	


[1] Test conditions : 25°C±2°C, at beginning of life and calibration mode, 0.2C charge & 0.2C discharge, 100% DOD.

[2] The current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

Model


SUN-3.6K-OG01LP1-EU-AM2 SUN-5K-OG01LP1-EU-AM2 SUN-6K-OG01LP1-EU-AM2

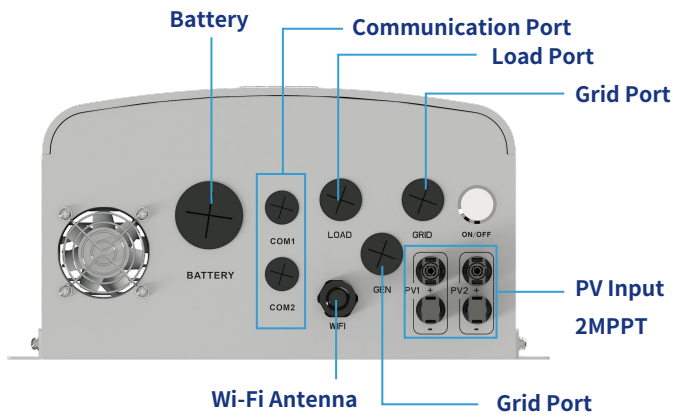

- ◎ Battery Port: Connects to the battery for energy storage, supporting 40-60V DC with a max charge/discharge current of 135A.
- ◎ Communication Port: Enables data exchange and system monitoring for seamless operation.
- ◎ Load Port: Delivers stable AC power to connected household loads.
- ◎ Grid Port: Links to the utility grid for energy exchange and system stability.
- ◎ Generator Port: Connects to a backup generator for additional power supply during outages.
- ◎ PV Input: Supports solar panel connection with 2 MPPTs, handling up to 9600W input power.
- ◎ Wi-Fi Antenna: Allows wireless connectivity for remote monitoring and system management.

Model

SE-F5&SE-F12

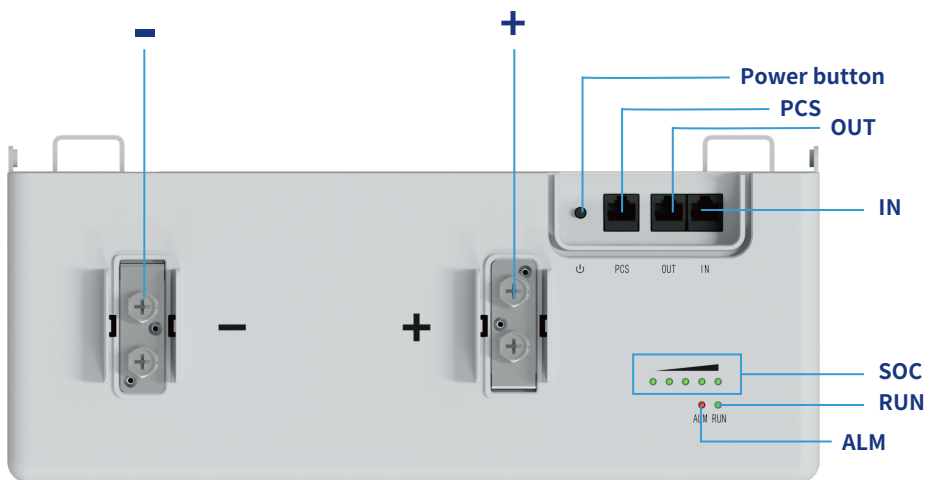

- ◎ -: Battery negative terminal connection position.
- ◎ +: Battery positive terminal connection position.
- ◎ SOC: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ◎ RUN light: green LED lighting to show the battery running status.
- ◎ ALM light: red LED lighting to show the battery has been alarmed .
- ◎ Power button: Power on or off the control battery.
- ◎ PCS: Inverter communication terminal:(RJ45port) follow the CAN protocol (baud rate:500kbps),and RS485(baud rate:9600bps),used to output battery information to the inverter.
- ◎ OUT: parallel Communication Terminal:(RJ45port) Connect "IN"Terminal of Next battery,for Communication between multiple parallel batteries.
- ◎ IN: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery,for Communication between multiple parallel batteries.

Deye APP



Bluetooth APP Monitoring





Low Power (Bluetooth LE)



Automated upgrade



Local monitoring mode for battery

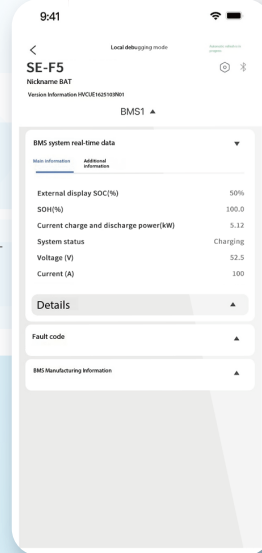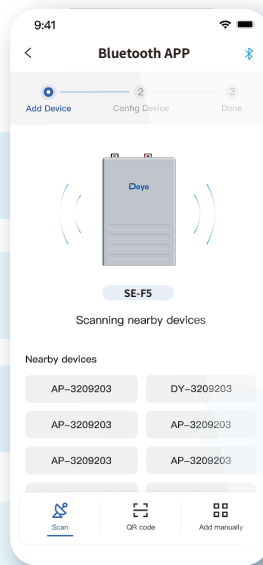

Quick Pairing




No Internet Needed



Portable Control



Remote monitoring mode for ESS(Inverter&Battery)

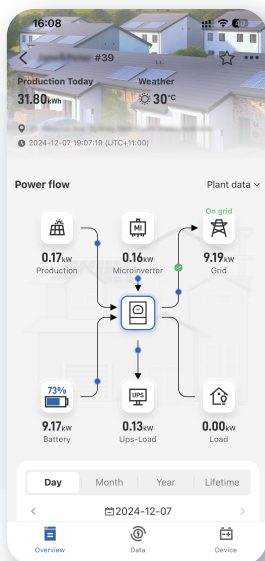

Real-time Equipment Monitoring



Intelligent Charging/Discharging Strategies



AI Data Analytics



Customized Maintenance

Smarten Up Your Home Energy




Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant



Deye Smart Energy Management System(Optional)

The Deye Smart Energy Management System enables seamless control with smart CT, smart plug, smart switch and solar EV charging, ensuring efficiency and full compatibility with Deye inverters.

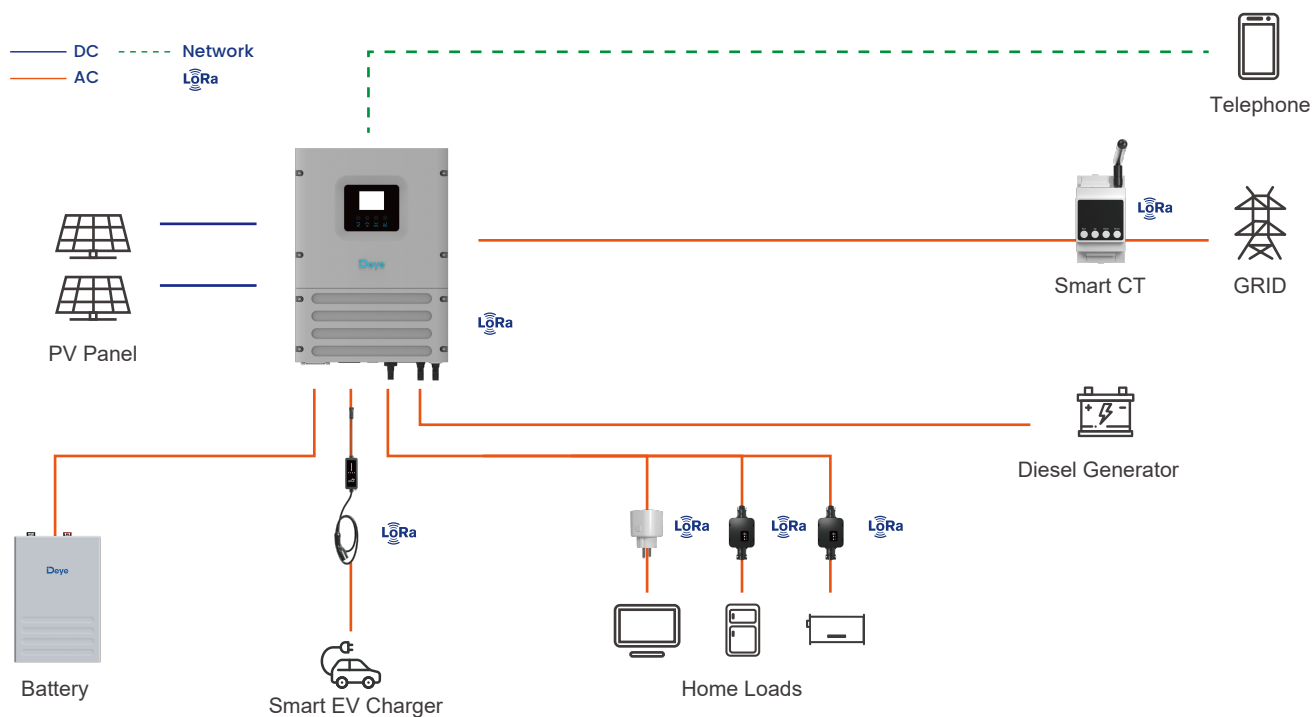

Key Features

● Wireless Zero Export Control

Enables seamless zero export without the need for complex wiring, simplifying installation.

● Intelligent Load Control

Automatically manages loads based on time schedules and battery SOC, optimizing energy distribution.

● Solar-Powered EV Charging

Supports 100% solar charging with dynamic power adjustment for enhanced efficiency and sustainability.

● Full Compatibility

All Deye hybrid inverters can be upgraded to support this system, ensuring seamless integration with existing setups.

● Precise Off-Grid Load Management

Ensures that only non-essential loads are disconnected during off-grid operation, maintaining power supply for critical applications.





POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy